


Special angle cleats allow panels to be stepped.  
0-35mm & 85-123mm on site

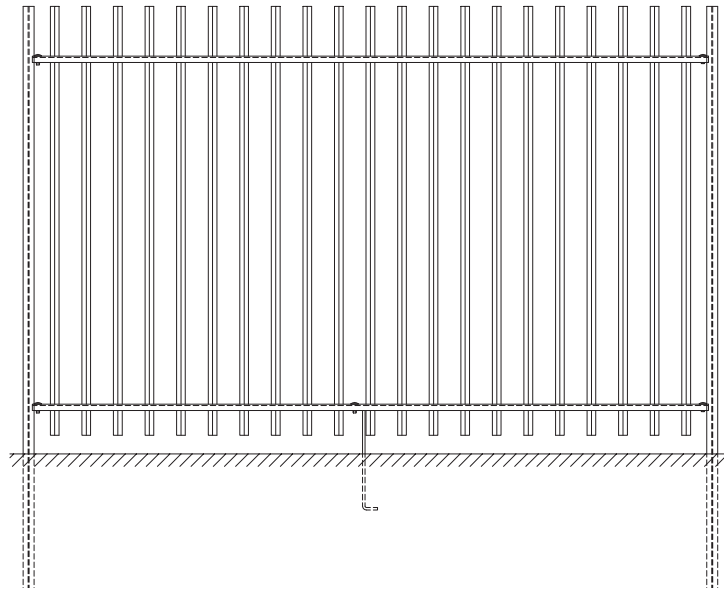

## DiameX® Standard Specification

### PANELS

|             |                           |
|-------------|---------------------------|
| Heights     | 1800, 2000, 2400, 3000*mm |
| Verticals   | 25 x 25 RHS               |
| Bar Spacing | 127mm ctrs                |

\*3000mm High Fence has a third horizontal rail

### POSTS

|              |              |
|--------------|--------------|
| Post Size    | 102 x 44 RSJ |
| Post Centres | 2750mm       |

### DiameX® Dart



### DiameX® Deterrent



### Features:

- ▶ Strong angle to view railing design
- ▶ Welded construction in line with BS 1722 Pt. 9
- ▶ Stepping cleats
- ▶ Security fixings
- ▶ Hot Dip Galvanised to BS EN ISO 1461
- ▶ Polyester Powder Coating (optional)

### Suitable for:

- ▶ Schools, Colleges & Universities
- ▶ Industrial Estates
- ▶ Retail Parks

TEL: 01782 339320

FAX: 01782 339323

fencing@iae.co.uk

www.iae.co.uk

